

**MMX SERIES RAXN-LCD  
REMOTE NETWORK LCD ANNUNCIATOR**

RAXN-LCD mounted in an MMX-BB-1001DR enclosure

**Features**

- Provide the same functions as the main display on the MMX Series fire alarm control units
- Large 80 character (4x20) back-lit LCD display
- Connect to any node to annunciate the full network system or selected network nodes
- Does not take up a node address
- Easy to use menu system complete with a directional keypad and switches
- Four Status Queues with selector switches and LEDs for Alarm, Supervisory, Trouble and Monitor to sort events
- Support programmable modules and annunciator modules
- RAXN-LCD can mount in a MMX Series annunciator enclosure

**Description**

Secutron's MMX Series Intelligent Fire Alarm and Audio Network System supports several network annunciators that provide the same functions as the main display on the fire alarm control unit. The RAXN-LCD connects to any node and can annunciate the full network system or selected network nodes.

The RAXN-LCD network annunciator is available in a 80 character (2x40) display. This remote annunciator is equipped with an easy to use menu system complete with a directional keypad and switches for Enter, Menu, Cancel and Info. The remote network annunciator have four status queues with selector switches and LEDs for Alarm, Supervisory, Trouble and Monitor. The network annunciator also has common control switches and LEDs for Signal Silence, Fire Drill, System Reset, Lamp Test, General Alarm and Acknowledge.

In addition to being network annunciators, these units can be used as driver modules for LED annunciation, graphic annunciation, programmable switch modules and fan damper control modules.

The RAXN-LCD network annunciators also allows for the control switches to be disabled on a per function basis (via laptop configurator) for areas that do not require certain Common Control functions to be remotely located from the Fire Alarm Control Unit. RAXN-LCD can be mounted in an MMX Series annunciator enclosure.


NYC  
Fire Dept**SECUTRON INC.**

Canada 25 Interchange Way, Vaughan (Toronto), Ontario L4K 5W3  
U.S.A. 4575 Witmer Industrial Estates, Niagara Falls, NY 14305  
www.secutron.com

Tel: (905) 660-4655 Fax: (905) 660-4113  
Tel: (888) 660-4655 Fax: (888) 660-4113

Catalog Number

**1030**  
Issue 6

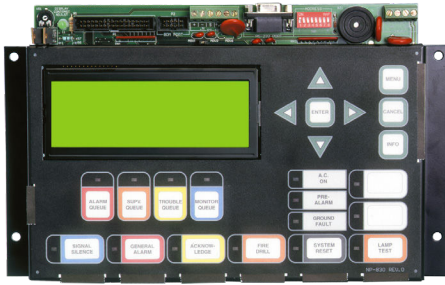

### RAXN-LCD Remote Network LCD Annunciator

The RAXN-LCD Remote Network LCD Annunciator is equipped with a large 4 line x 20 character back-lit alphanumeric LCD display that provides an exact replica of the main MMX fire alarm control unit display. The RAXN-LCD occupies one display position in the MMX-BB-1000 Series enclosures.

### RAXN-LCD Current Consumption

Standby (Amps)	Lamp Test w/ All LEDs On (Amps)
0.100	0.150

### Dimensions for BB-1000 Series Enclosures

Model	Dimensions
MMX-BB-1001DR	9"H x 12.75"W x 1.85"D
MMX-BB-1002DR	18"H x 12.75"W x 1.85"D
MMX-BB-1003DR	26.4"H x 12.75"W x 1.85"D
MMX-BB-1008DR	33"H x 22.5"W x 1.85"D
MMX-BB-1012DR	45"H x 22.5"W x 11.85"D

## Ordering Information

Model	Description
<b>Network Annunciators</b>	
RAXN-LCD	Remote Network LCD Annunciator c/w 4 line x 20 character backlit LCD display
<b>Enclosures</b>	
MMX-BB-1001DR	Enclosure for RAXN-LCD or RAXN-LCDG Annunciators, Red Door. Houses 1 module.
MMX-BB-1002DR	Enclosure for RAXN-LCD or RAXN-LCDG Annunciators, Red Door. Houses 2 modules.
MMX-BB-1003DR	Enclosure for RAXN-LCD or RAXN-LCDG Annunciators, Red Door. Houses 3 modules.
MMX-BB-1008DR	Enclosure for RAXN-LCD or RAXN-LCDG Annunciators, Red Door. Houses 8 modules.
MMX-BB-1012DR	Enclosure for RAXN-LCD or RAXN-LCDG Annunciators, Red Door. Houses 12 modules.