



### Features

- Two and four wire models
- Photoelectric smoke sensing technology
- Uses smoke sensor in conjunction with a fixed temperature heat sensor to extend reliability
- Durable sensor head, no need for replacement
- Remote LED output on select 2-wire models
- N/C (normal close) or N/O (normal open) selectable relay output
- Easy installation and maintenance
- Attractive sleek housing
- UL listed

### Description

The SD Series photoelectric smoke detectors are engineered to meet strict UL fire safety codes and effectively respond to a wide spectrum of fires. The SD Series smoke detectors are suitable for use in commercial, industrial, institutional and residential occupancies. The sleek low-profile design of the detectors emphasizes ease of installation and field maintenance.

The SD Series consists of six models:


**SD-2WP / SD-2WT / SW-2WP-LED / SD-2WT-LED** The SD-2WP is a two-wire photoelectric smoke detector for use with electrically compatible fire alarm control units. The SD-2WT is a two-wire smoke detector that uses photoelectric technology in conjunction with a fixed temperature heat sensor to further extend its sensing capabilities. Additional two wire models (SD-2WP-LED and SD-2WT-LED) are available with a remote LED output.

#### SD-4WP / SD-4WT

The SD-4WP is a four-wire photoelectric smoke detector. The SD-4WT is a four-wire photoelectric smoke detector with a fixed temperature heat sensor.

All SD Series smoke detectors come equipped with a sleek low-profile design and durable sensor head. Utilizing advanced detection and discrimination algorithms, the SD Series smoke detectors provide quality and reliability.

### Installation Diagram

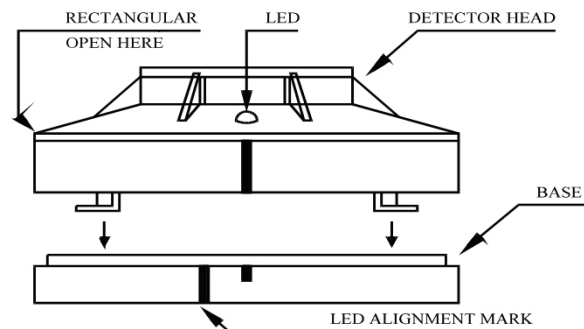

## Electrical Specifications

Model	2/4 wire	Heat Sensor	Voltage DC	Standby Current (Max.)	Alarm Current (Max.)	Surge Current (Max.)	Star-Up Time (Max.)	Permissible Current (Max.)	Frequency	Alarm contact
SD-4WT	4	135°F	12/24V	370µA	35mA		60 Seconds	80mA	3-5 Seconds	Form A
SD-4WP	4		12/24V	370µA	35mA		60 Seconds	80mA	3-5 Seconds	Form A
SD-2WT	2	135°F	12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—
SD-2WP	2		12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—
SD-2WT-LED	2	135°F	12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—
SD-2WP-LED	2		12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—

<b>Smoke Sensitivity</b>	2.66+/- 1.11% FT Obscuration (UL standard)
<b>Detection Range</b>	50 foot rating for heat sensor
<b>Start-Up Current</b>	70 µA Maximum
<b>Alarm Impedance</b>	For 2-wire models: 100Ω+3V max; 560Ω+3V max (red LED open circuit)
<b>Reset Voltage</b>	Less than 1 volt
<b>Reset Time</b>	Less than 1 sec
<b>Alarm Indicator</b>	Continuously emitting red light
<b>Temperature range</b>	-10°C to 50°C
<b>Humidity</b>	0 to 95% RH, non condensing
<b>Alarm Contact</b>	For 4-wire: N/O or N/C Operation Form A: 1.0A@30VDC/0.5A@125VAC
<b>Dimensions</b>	10mm (dia) x 46mm (ht) with base
<b>Weight</b>	130g/set with base

## Ordering Information

Model	Description
SD-2WP	2-wire photoelectric smoke detector. Includes 4-inch base.
SD-2WT	2-wire photoelectric smoke detector with heat sensor. Includes 4-inch base.
SD-2WP-LED	2-wire photoelectric smoke detector with heat sensor and remote LED output. Includes 4-inch base
SD-2WT-LED	2-wire photoelectric smoke detector with heat sensor and remote LED output. Includes 4-inch base.
SD-4WP	4-wire photoelectric smoke detector c/w 4-inch base
SD-4WT	4-wire photoelectric smoke detector with heat sensor c/w 4-inch base



**Canada**  
25 Interchange Way  
Vaughan, Ontario L4K 5W3  
Telephone: (905) 660-4655  
Fax: (905) 660-4113

**U.S.A.**  
4575 Witmer Industrial Estates  
Niagara Falls, NY 14305  
Toll Free: (888) 660-4655  
Fax Toll Free: (888) 660-4113



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness.