


**MRI-4041  
MINI DUAL INPUT MODULE**

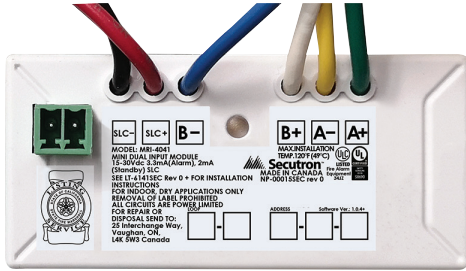

**Features**

- Any combination of MRI-4000 series devices up to 240 can be connected on a single SLC
- Fits in a single gang junction box
- Indicating LED provides module status

**Benefits**

- Fast, reliable contact monitoring.
- Will automatically set inputs to single Class A or dual Class B according to the configuration sent by the fire alarm panel.
- No EOL resistor required when input is in Class A operation.
- Monitors two (2) independent circuits in Class B using one (1) module address.

**Description**

The MRI-4041 Mini Dual Input Monitor Module is an intelligent addressable device designed to be used with a compatible fire alarm control unit, providing high rates of information exchange and fast and secure responses.

The MRI-4041 Mini Dual Input Monitor Module provides two (2) independent contact monitoring circuits only utilizing one (1) address on the SLC loop.

The module supports one (1) Class A or two (2) Class B inputs. When configured for Class A operation, the module provides an internal EOL resistor.

When configured for Class B operation, the module can monitor two (2) independent input circuits while using only one (1) module address.

The module has a panel controlled LED indicator. The LED flashes during normal operation and stays ON steadily when the device is in alarm condition.

The address of each module is set using the MIX-4090 programming tool. For setting the address on this device, disconnect it from the loop, or ensure that the loop to which is connected is both disconnected from the panel and shorted across the SCL+ and SLC- inputs at the device. Failing to take either of these steps may change the address programming of previously configured sensors on the loop.

**Technical Specifications**

Normal Operating Value	15 to 30 VDC
Maximum Alarm Current	3.3mA (LED on)
EOL Resistance	22K Ohms
Maximum Input Wiring Resistance	150 Ohms Total
Temperature Range	32°F to 120°F (0°C to 49°C)
Humidity	10% to 93% Non-condensing
Dimensions	1.25" H x 2.75" W x 0.50" D
Connections	6" pigtail wires
Standby Current (2 Class B)	2mA

**Ordering Information**

Model	Description
MRI-4041	Mini Dual Input Monitor Module
MIX-4090	MIX-4000 Addressable Device Programmer
MP-302	EOL on Mounting Plate



This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property.



**SECUTRON INC.**

Canada 25 Interchange Way, Vaughan (Toronto), Ontario L4K 5W3 Tel: (905) 695-3545 Fax: (905) 660-4113

U.S.A. 4575 Witmer Industrial Estates, Niagara Falls, NY 14305 Tel: (888) 695-3545 Fax: (888) 660-4113

www.secutron.com

Catalog Number

**4042**

Issue 3