


**MRI-4001 / MRI-4002  
4000 SERIES DETECTOR BASES**

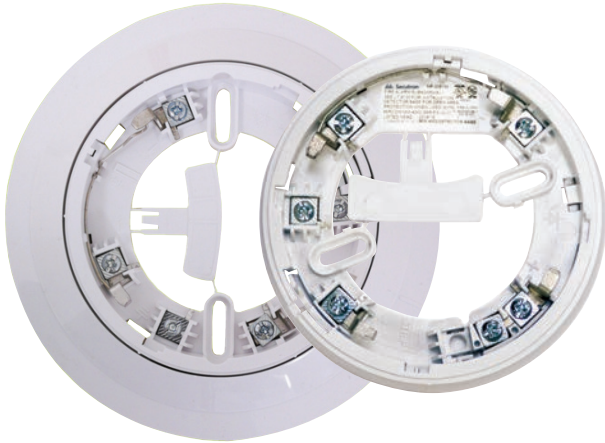

MRI-4001 / MRI-4002

**Features**

- Sleek low profile design
- Ceiling or wall mountable
- 4" or 6" options
- The base provides a device Anti-Tamper feature

**Benefits**

- Open style mounting bases offer easy wiring and low pressure docking
- Save time with multiple mounting options
- A breakable flat tab in the centre of the base can be cut and inserted in the base outer edge, then a label can be used to identify the device

**Description**

The MRI-4001 and MRI-4002 mounting bases are used to interface series 4000 detectors to the SLC line and remote devices.

The low profile base can be wired and secured to a back-box during building construction, allowing the detector to be installed later, when premises become free of dust and other contaminants.

**Technical Specifications**

Wiring Range on all terminals	22 to 12 AWG
Diameter	6" (MRI-4001) 4" (MRI-4002)
Height	0.625" Height



**Ordering Information**

Model	Description
MRI-4001	6" Detector Base
MRI-4002	4" Detector Base

**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.



**SECUTRON INC.**

Canada 25 Interchange Way, Vaughan (Toronto), Ontario L4K 5W3  
 U.S.A. 4575 Witmer Industrial Estates, Niagara Falls, NY 14305  
 www.secutron.com

Catalog Number

**4046**  
Issue 1

Tel: (905) 695-3545 Fax: (905) 660-4113  
 Tel: (888) 695-3545 Fax: (888) 660-4113