


# MINI HORN REMOTE SIGNALING DEVICE

MH-25 R (RED)  
MH-25 W (WHITE)

## INSTALLATION INSTRUCTIONS

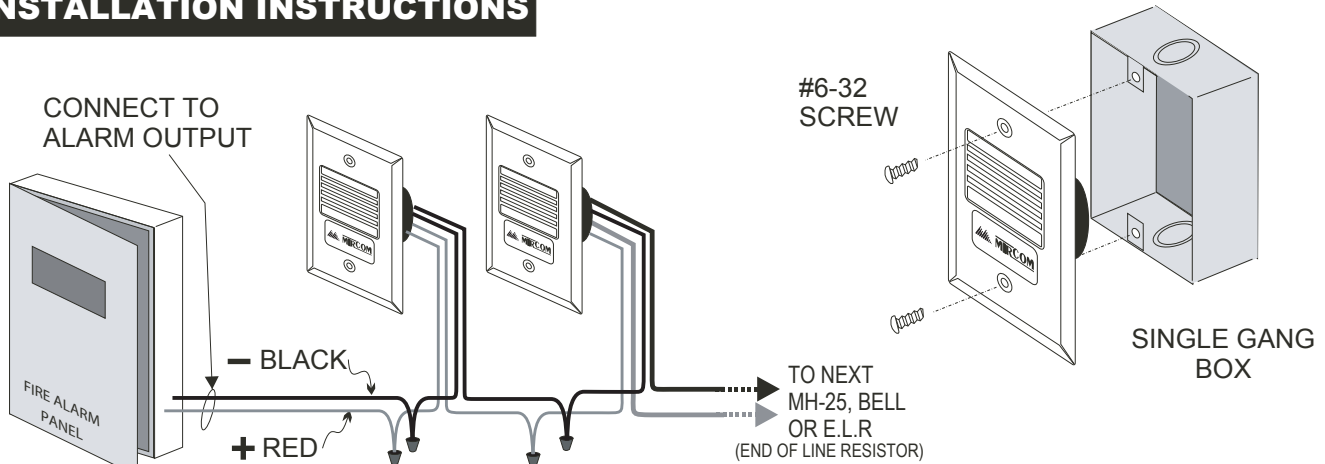

Use both leads for connection.  
Break wire run to provide electrical supervision.

## SPECIFICATIONS


RATED VOLTAGE	16-33Vdc Regulated 24Vdc/fwr		
RATED CURRENT	45 mA		
OVERALL SOUND PRESSURE LEVEL (dBA, anechoic)	TONE	@ 16 V	@ 33 V
	Continuous	81	87
	Temporal (via FACP)	82	89
DIRECTIONAL CHARACTERISTIC (represents both horizontal and vertical axes)	ANGLE	OSPL (dBA)	
	0° (on-axis)	0 (ref)	
	-90° & 90°	-3	

Sound Level in the indoor installation may vary depending upon the space surroundings  
Devices are intended for dwelling use ONLY  
Mircom does not recommend any changes to the factory applied finish

**Operating temperature:** -20°C ~ +60°C (-4°F ~ +140°F)  
Plate: A.B.S  
Color Selection: Red/White  
Weight: 2.2 oz (63g)  
Two #6-32 screws provided



## DIMENSIONS

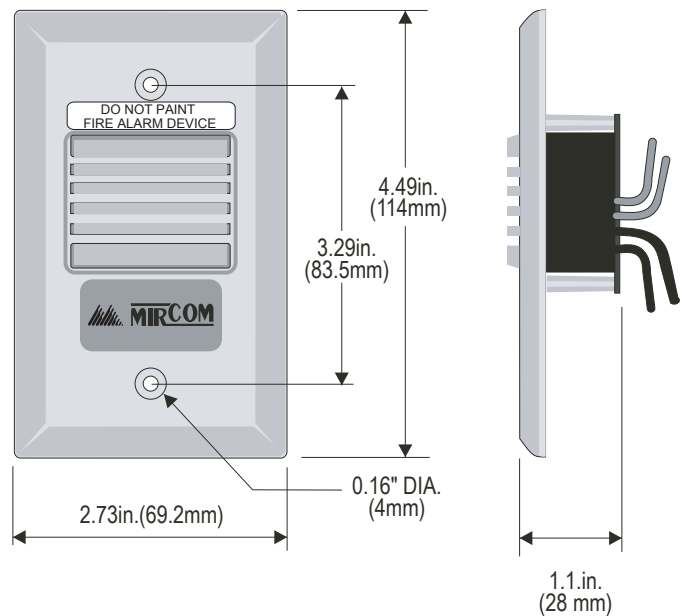

MIRCOM TECHNOLOGIES LTD.  
25 INTERCHANGE WAY,  
VAUGHAN (TORONTO), ONTARIO L4K 5W3  
TEL: (905)660-4655 FAX: (905) 660-4113

**U.S. DISTRIBUTION CENTRE**  
MIRCOM TECHNOLOGIES LTD.  
4575 WITMER INDUSTRIAL ESTATES  
NIAGARA FALLS, NY 14305  
TEL: (888)660-4655 FAX: (888) 660-4113