




MR-2300 Series Conventional LED Fire Alarm Control Panels



Secutron's MR-2300 Series conventional fire alarm control panels are multi-zone units designed for maximum flexibility, easy installation and worry-free operation. Available in eight and twelve zone configurations, the MR-2300 Series panels are designed for small to medium-sized applications and can be configured to meet specific building requirements.

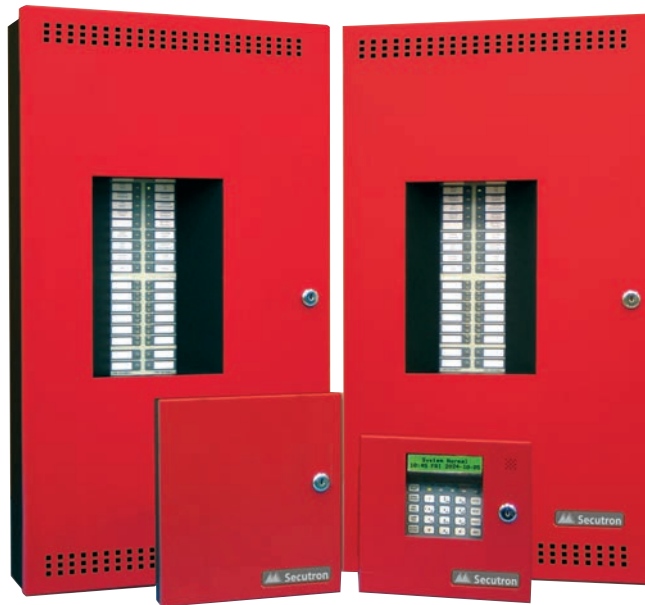

Quick and Easy System Configuration

The MR-2300 Series panels can be configured through the following:

- Front Panel using the CFG-300 configurator tool.
- Software for remote or on-site programming.

The panels are also equipped with a built-in auto-correlate feature that automatically matches output functions (NACs, Relays, DACT messages) to input (zone) assignments.

- This feature simplifies the configuration process, reducing setup time and labor costs.



Ideal for Retrofit Applications

The MR-2300 Series panels is compatible with the following:

- A broad range of legacy 2-wire smoke detectors made by various manufacturers.
 - ◊ Eliminates the need to replace the existing smoke detectors, which reduces costs and saves installation time.



Built-In Sync Protocols


- The MR-2300 Series panels have built-in sync protocols for most major strobe manufacturers.



Cost-Effective Solution for NAC Devices

- Including the MGC 400 Series LED notification devices that feature a lower current draw than most competitive models.

MR-2300 Series System Diagram

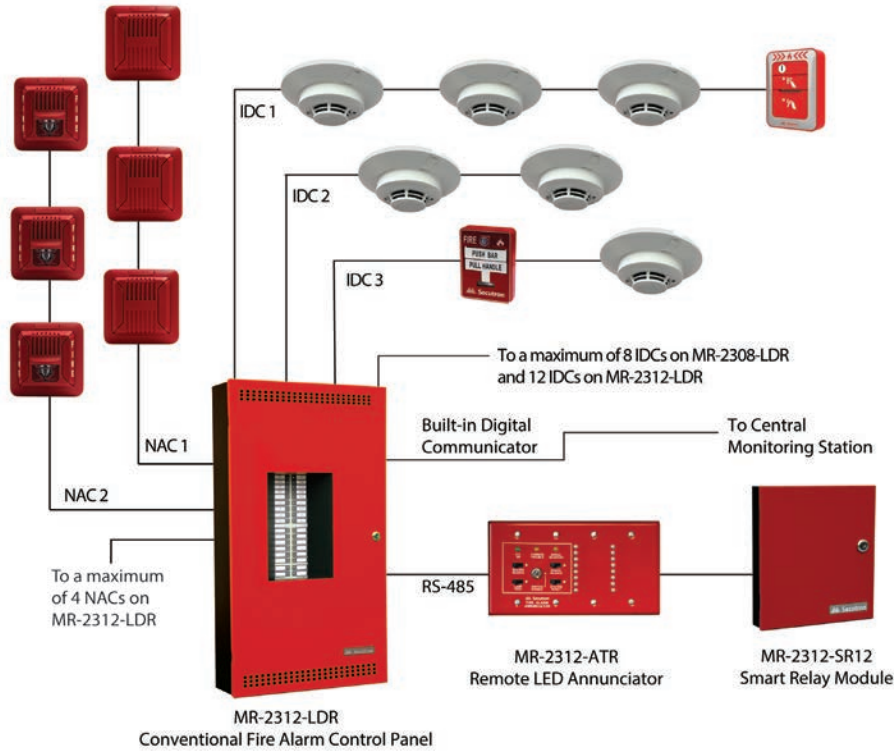

Additional Features & Benefits:

- Listed to UL 864, 10th Edition and ULC S527, 4th Edition.
- Integrated UDACT/Digital Communicator, available on select models, that allows for central station reporting and remote configuration.
- Optional internal relay circuit modules for applications that require additional relay functionality.
- Supports MGC's SD-100 Series and System Sensor's i3 Series conventional smoke detectors.
- Optional Class A Converter Modules that allow for full Class A configuration.
- Built-in RS-485 interface that supports remote LCD annunciators, LED annunciators and smart relay modules.
- Optional trim rings for semi-flush mount applications.

Features Overview

Features	MR-2308-LR	MR-2308-LDR	MR-2312-LDR
Number of Initiating Device Circuits (IDC)	8 - Class B	8 - Class B	12 - Class B
Number of Notification Appliance Circuits (NAC)	4 - Class B	4 - Class B	4 - Class B
NAC Rating	1.7 Amps/NAC	1.7 Amps/NAC	1.7 Amps/NAC
Class A Converter Module for IDCs & NACs	Yes	Yes	Yes
Max. System Power	5 Amps	5 Amps	5 Amps
Built-in Digital Communicator	No	Yes	Yes
Two Event Logs	Yes	Yes	Yes
Supports LCD & LED Remote Annunciators	Yes	Yes	Yes
Local & Remote Programming Options	Yes	Yes	Yes
Built-in Strobe Synchronization	Yes	Yes	Yes
Agency Listings	UL, ULC, CFSM, MEA	UL, ULC, CFSM, MEA	UL, ULC, CFSM, MEA

For complete product specifications and ordering information, refer to CAT-1050 MR-2300 Series LED Display Fire Alarm Control Panels Data Sheet.

For more information visit
Secutron.com