

# MRM-710(U) SERIES

**CONVENTIONAL MANUAL PULL STATIONS** 



#### **Features**

- Dual Action
- Key resettable
- Terminal connectors
- Gold plated SPST contacts
- Optional auxiliary contacts
- High-gloss red enamel finish
- Plastic breakrod
- Meets ADA 5 lb. maximum manual-force
- Mounts on standard single gang box, Secutron's MRM-700 surface metal backbox or MRM-700WP weather proof backbox

### Description

Secutron's MRM-710(U) Series Manual Pull Station provides manual fire reporting. This high quality, die-cast metal manual station is a dual action unit with SPST contacts and terminal strip connections. The normally open contact, which closes when the manual station is activated, is rated for 1 amp, 30 VDC. The contacts are gold plated to avoid the risk of corrosion.

The MRM-710(U) Series Manual pull stations is available with CAT-30 lock and keys and mounts on a standard single gang backbox, Secutron's MRM-700 surface metal backbox or MRM-700WP weather proof backbox.

The MRM-710(U) Series Manual pull stations is listed for outdoor applications when used with the MRM-700WP.

#### Operation

The MRM-710(U) Series Manual pull stations is operated by pushing the bar and then pulling down the handle on the front of the station. The unit is reset by opening the station with the key, placing the handle in the normal upright position and relocking the station.

### **Specifications**

The manual station shall be Secutron's MRM-710(U) Series Manual pull stations. Operating instructions shall be in raised English or English and French lettering and the unit shall be constructed of high quality die-cast metal and finished in red enamel paint to provide quick identification. Pulling the handle shall initiate immediate operation of the alarm detection circuit. All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.





Catalog Number

2033 Issue 7

#### **Specifications**

Switch Rating:

Manual Station Dimensions: Color: 1 Amp @ 30 VDC 0.1 Amp @ 125 VAC 4.9" H x 3.5" W x 2.0" D Red with raised white letters, white manual bar with raised black letters.

### Surface Mount Backboxes



MRM-700 Surface Mount Backbox


Dimensions: 5" H x 3.6" W x 2.0" D



#### MRM-700WP Weatherproof Surface Mount Backbox

Dimensions: 5" H x 3.6" W x 2.2" D

# **Typical Wiring Diagram**

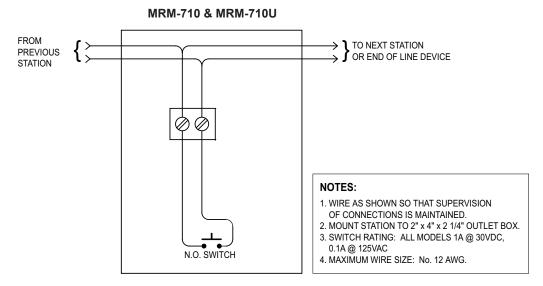

## **Ordering Information**

Model	Description
MRM-710	Dual Action Bilingual Manual Station, ULC
MRM-710U	Dual Action Manual Station, UL
MRM-700	MRM-700U Series Interior Surface Mount Backbox, Red Finish
MRM-700WP	MRM-700U Series Weatherproof Surface Mount Backbox, Red Finish

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property.